

PRODUCT DATA SHEET

Sikaflex®-291i

Multifunctional adhesive sealant for marine applications

TYPICAL PRODUCT DATA (FURTHER VALUES SEE SAFETY DATA SHEET)

Chemical base		1-component polyurethane
Color (CQP001-1)		White, grey, black, brown
Cure mechanism		Moisture-curing
Density (uncured)	depending on color	1.3 kg/l
Non-sag properties		Good
Application temperature	ambient	10 – 40 °C
Skin time (CQP019-1)		60 minutes ^A
Open time (CQP526-1)		45 minutes ^A
Curing speed (CQP049-1)		(see diagram)
Shrinkage (CQP014-1)		2 %
Shore A hardness (CQP023-1 / ISO 48-4)		40
Tensile strength (CQP036-1 / ISO 527)		1.8 MPa
Elongation at break (CQP036-1 / ISO 527)		700 %
Tear propagation resistance (CQP045-1 / ISO 34)		7 N/mm
Service temperature (CQP513-1)		-50 – 90 °C
	4 hours	120 °C
	1 hour	140 °C
Shelf life		12 months ^B

CQP = Corporate Quality Procedure

^A) 23 °C / 50 % r. h.^B) storage below 25 °C

DESCRIPTION

Sikaflex®-291i is a non-sag 1-component polyurethane sealant specifically developed for the marine market, which cures on exposure to atmospheric moisture.

Sikaflex®-291i meets in addition the low spread of flame requirements set out by the International Maritime Organisation (IMO).

PRODUCT BENEFITS

- Wheelmark approved
- 1-component formulation
- Highly elastic
- Low odour
- Non-corrosive
- Can be painted
- Bonds well to a wide variety of marine substrates
- Solvent free
- Very low VOC
- Low isocyanate content

AREAS OF APPLICATION

Sikaflex®-291i is a multipurpose product used in marine constructions. It is suitable for making elastic, vibration-resistant joint seals, and can also be used for a variety of interior sealing applications. Sikaflex®-291i bonds extremely well to the materials commonly used in marine construction like wood, metals, metal primers and paint coatings (2-C systems), ceramic materials and plastics (GRP, etc.). Sikaflex®-291i must not be used to seal plastics that are prone to stress cracking (e.g. PMMA, PC, etc.).

This product is suitable for experienced professional users only. Test with actual substrates and conditions have to be performed to ensure adhesion and material compatibility.

PRODUCT DATA SHEET

Sikaflex®-291i

Version 05.01 (04 - 2023), en_DK
012001202914001100

CURE MECHANISM

Sikaflex®-291i cures by reaction with atmospheric moisture. At low temperatures the water content of the air is generally lower and the curing reaction proceeds somewhat slower (see diagram 1).

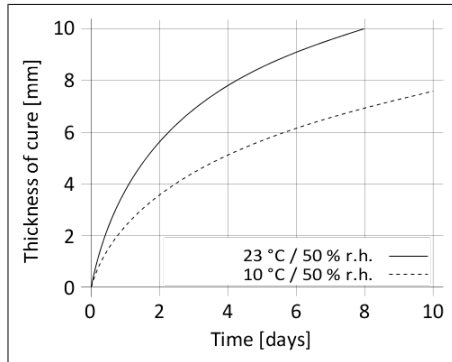


Diagram 1: Curing speed for Sikaflex®-291i

CHEMICAL RESISTANCE

Sikaflex®-291i is generally resistant to fresh water, seawater, diluted acids and diluted caustic solutions; temporarily resistant to fuels, mineral oils, vegetable and animal fats and oils; not resistant to organic acids, glycolic alcohol, concentrated mineral acids and caustic solutions or solvents.

METHOD OF APPLICATION

Surface preparation

Surfaces must be clean, dry and free from grease, oil and dust.

Surface treatment depends on the specific nature of the substrates and is crucial for a long lasting bond. Suggestions for surface preparation may be found on the current edition of the appropriate Sika® Pre-Treatment Chart. Consider that these suggestions are based on experience and have in any case to be verified by tests on original substrates.

Application

Sikaflex®-291i can be processed between 10 °C and 40 °C but changes in reactivity and application properties have to be considered. The optimum temperature for substrate and sealant is between 15 °C and 25 °C.

Sikaflex®-291i can be processed with hand, pneumatic or electric driven piston guns.

Tooling and finishing

Tooling and finishing must be carried out within the skin time of the sealant. It is recommended using Sika® Tooling Agent N. Other finishing agents must be tested for suitability and compatibility prior the use.

Removal

Uncured Sikaflex®-291i can be removed from tools and equipment with Sika® Remover-208 or another suitable solvent. Once cured, the material can only be removed mechanically. Hands and exposed skin have to be washed immediately using Sika® Cleaner-350H cleaning towels or a suitable industrial hand cleaner and water.

Do not use solvents on skin!

Overpainting

Sikaflex®-291i can be best painted after formation of a skin. Painting could be improved by treating the joint surface with Sika® Aktivator-100 or Sika® Aktivator-205 prior to paint process. If the paint requires a baking process (> 80 °C), best performance is achieved by allowing the sealant to fully cure first. All paints have to be tested by carrying preliminary trials under manufacturing conditions.

The elasticity of paints is usually lower than that of sealants. This could lead to cracking of the paint in the joint area.

FURTHER INFORMATION

The information herein is offered for general guidance only. Advice on specific applications is available on request from the Technical Department of Sika Industry.

Copies of the following publications are available on request:

- Safety Data Sheets
- Sika Pre-treatment Chart For Marine Applications
- General Guidelines Bonding and Sealing with Sikaflex® and SikaTack®

PACKAGING INFORMATION

Mini Unipack	70 ml
Cartridge	300 ml*
Unipack	400 ml*
	600 ml*

* Not on stock in DK

BASIS OF PRODUCT DATA

All technical data stated in this document are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

HEALTH AND SAFETY INFORMATION

For information and advice regarding transportation, handling, storage and disposal of chemical products, users shall refer to the actual Safety Data Sheets containing physical, ecological, toxicological and other safety-related data.

DISCLAIMER

Any information or suggestions for use concerning Sika's products, which we either in writing or orally have given buyers or end-users of the product, have been given in good faith based on our own experiences and based on approved praxis and the technological and scientific knowledge on the time of giving such suggestions and information, which are given without any type of guarantees, and which do not lead to any further responsibility from Sika Danmark A/S, besides what is stated in the sales agreement in question. The buyer or end-user should themselves investigate or otherwise make sure, that our products are suitable for the use in question and further make sure that the products are kept and used correct and in agreement with the published rules and considering the actual conditions in order to avoid damages or less satisfactory results. Any order is accepted and any deliverance is affected according to the general terms of sales and delivery from Sika Danmark A/S, which are considered known and accepted, and which could be handed out when asked for. Our catalogues are not up-dated automatically. The present product data sheet is only for use in Denmark. Values stated in the present product data sheet should be seen as recommended, unless stated otherwise.

PRODUCT DATA SHEET

Sikaflex®-291i
Version 05.01 (04 - 2023), en_DK
012001202914001100

Sika Danmark A/S
Hirsemarken 5
3520 Farum
Tlf. +45 48 18 85 85
www.sika.dk

