



Sikafloor® Marine Litosilo X HIGH STRENGTH MORTAR

- Fast setting
- Non-combustible
- Magnesium-chloride-free
- Ideal for refits and heavy duty areas
- Part of A-60 floating floor

Sikafloor® Marine Litosilo X

Sikafloor® Marine Litosilo X is a one component medium weight high strength leveling mortar based on polymer modified cement with excellent flame resistance. The product has been specifically designed for heavy duty A-60 areas. Always for interior decks and as part of a floating floor the Sikafloor® Marine Litosilo X is the best in class.


For specific applications consult the product data sheet or contact your Sika Technical Service.

PRODUCT BENEFITS

- Fast setting
- Can be used as levelling compound
- Up to 61 dBs airborne noise reduction in floating floors
- Pumpable
- Non-combustible
- Magnesium-chloride-free
- Ideal for refits and heavy duty areas

AREAS OF APPLICATION

- For interior areas only
- Suitable for heavy duty areas
- A-60 decks
- Lounges, dining rooms, corridors, cabin areas, etc.

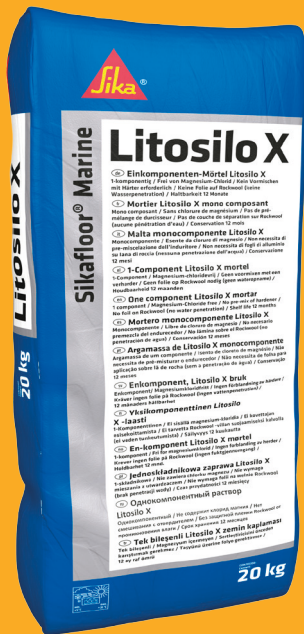

Typical Product Data	
Color	Grey
Cure mechanism	Hydraulic
Mixing ratio with cold, potable water per 20 kg bag	4.0 - 4.6 liters (21 - 23%)
Density cured ¹	1.3 g/cm ³ approx.
Application thickness leveling floating floor	6 - 100 mm 25 - 100 mm
Coverage per 25 kg bag (layer thickness 1 mm)	13 m ² approx.
Working time ²	20 minutes approx.
Ready to walk on ²	3 hours approx.
Shelf life	12 months

¹) After 7 days

²) 23°C / 50% r.h.

Our most current General Sales Conditions shall apply.

Please consult the Data Sheet prior to any use and processing.



SIKA SERVICES AG
Tueffenwies 16
8048 Zurich
Switzerland

CONTACT

Phone: +41 58 436 40 40
Fax: +41 58 436 55 30
www.sika.com/marine
www.sika.com/marine_innovations

BUILDING TRUST

