

## PRODUCT DATA SHEET

# Sikaflex®-295 UV

Exterior sealant and direct glazing adhesive for organic glass in Marine applications

**TYPICAL PRODUCT DATA (FURTHER VALUES SEE SAFETY DATA SHEET)**

Chemical base	1-component polyurethane
Color (CQP001-1)	Black, white <sup>C</sup>
Cure mechanism	Moisture-curing
Density (uncured)	1.3 kg/l
Non-sag properties	Good
Application temperature	10 – 35 °C
Skin time (CQP019-1)	60 minutes <sup>A</sup>
Open time (CQP526-1)	45 minutes <sup>A</sup>
Curing speed (CQP049-1)	(see diagram 1)
Shrinkage (CQP014-1)	1 %
Shore A hardness (CQP023-1 / ISO 48-4)	35
Tensile strength (CQP036-1 / ISO 527)	2 MPa
Elongation at break (CQP036-1 / ISO 527)	500 %
Tear propagation resistance (CQP045-1 / ISO 34)	5 N/mm
Service temperature (CQP509-1 / CQP513-1)	-50 – 90 °C
Shelf life	12 months <sup>B</sup>

CQP = Corporate Quality Procedure

<sup>A</sup>) 23 °C / 50 % r. h.<sup>B</sup>) storage below 25 °C<sup>C</sup>) Not on stock in DK
**DESCRIPTION**

Sikaflex®-295 UV is a 1-component polyurethane adhesive of paste-like consistency that cures on exposure to atmospheric moisture. It is suitable for interior and exterior sealing applications and to bond organic glass in the Marine business.

Sikaflex®-295 UV meets the requirements set out by the International Maritime Organization (IMO).

**PRODUCT BENEFITS**

- Excellent application properties
- Resistant to ageing and weathering
- Suitable for organic glasses
- Approved for the OEM market
- Wheelmark approved

**AREAS OF APPLICATION**

Sikaflex®-295 UV has been specially developed for the marine industry, where it is used to bond and seal plastic glazing materials in boats and ships. Because of its excellent weatherability this product can also be used to seal joints in exposed areas.

Suitable substrates are aluminium (bright or anodized), GRP (polyester resin), stainless steel, timber, 2-component coatings and plastic glazing materials (PC, PMMA).

Seek manufacturer's advice and perform tests on original substrates before using Sikaflex®-295 UV on materials prone to stress cracking. This product is suitable for experienced professional users only. Test with actual substrates and conditions have to be performed to ensure adhesion and material compatibility.

**PRODUCT DATA SHEET**

Sikaflex®-295 UV

Version 03.01 (04 - 2023), en\_DK

012001212954001000

## CURE MECHANISM

Sikaflex®-295 UV cures by reaction with atmospheric moisture. At low temperatures the water content of the air is generally lower and the curing reaction proceeds somewhat slower (see diagram 1).

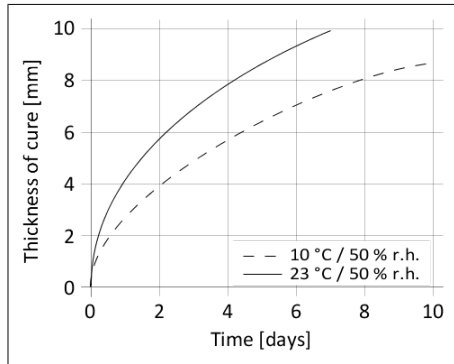


Diagram 1: Curing speed Sikaflex®-295 UV

## CHEMICAL RESISTANCE

Sikaflex®-295 UV is generally resistant to fresh water, seawater, diluted acids and diluted caustic solutions; temporarily resistant to fuels, mineral oils, vegetable and animal fats and oils; not resistant to organic acids, glycolic alcohol, concentrated mineral acids and caustic solutions or solvents.

## METHOD OF APPLICATION

### Surface preparation

Surfaces must be clean, dry and free from grease, oil, dust and contaminants. Surface treatment depends on the specific nature of the substrates and is crucial for a long lasting bond. Suggestions for surface preparation may be found on the current edition of the appropriate Sika® Pre-treatment Chart. Consider that these suggestions are based on experience and have in any case to be verified by tests on original substrates.

## Application

Sikaflex®-295 UV can be processed between 10 °C and 35 °C (climate and product) but changes in reactivity and application properties have to be considered. The optimum temperature for substrate and sealant is between 15 °C and 25 °C.

Consider that the viscosity will increase at low temperature. For easy application, condition the adhesive at ambient temperature prior to use. To ensure a uniform thickness of the bondline it is recommended to apply the adhesive in form of a triangular bead (see figure 1).

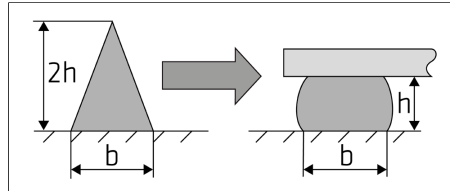


Figure 1: Recommended bead configuration

Sikaflex®-295 UV can be processed with manual, pneumatic or electric driven piston guns as well as pump equipment. The open time is significantly shorter in hot and humid climate. The parts must always be installed within the open time. Never join bonding parts if the adhesive has built a skin.

## Tooling and finishing

Tooling and finishing must be carried out within the skin time of the product. It is recommended using Sika® Tooling Agent N. Other finishing agents must be tested for suitability and compatibility prior the use.

## Removal

Uncured Sikaflex®-295 UV can be removed from tools and equipment with Sika® Remover-208 or another suitable solvent. Once cured, the material can only be removed mechanically. Hands and exposed skin have to be washed immediately using Sika® Cleaner-350H cleaning towels or a suitable industrial hand cleaner and water. Do not use solvents on skin.

## Overpainting

Sikaflex®-295 UV can be painted prior and after formation of a skin. If painting process takes place after the sealant has built a skin, adhesion could be improved by treating the joint surface with Sika® Aktivator-100 or Sika® Aktivator-205 prior to paint process. If the paint requires a baking process (> 80 °C), best performance is achieved by allowing the sealant to fully cure first. All paints have to be tested by carrying preliminary trials under manufacturing conditions.

The elasticity of paints is usually lower than that of sealants. This could lead to cracking of the paint in the joint area.

## FURTHER INFORMATION

Copies of the following publications are available on request:

- Safety Data Sheets
- Sika Pre-treatment Chart For Marine Applications
- General Guidelines Bonding and Sealing with 1-component Sikaflex®

## PACKAGING INFORMATION

Cartridge	300 ml
Unipack	400 ml 600 ml

## BASIS OF PRODUCT DATA

All technical data stated in this document are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## HEALTH AND SAFETY INFORMATION

For information and advice regarding transportation, handling, storage and disposal of chemical products, users shall refer to the actual Safety Data Sheets containing physical, ecological, toxicological and other safety-related data.

## DISCLAIMER

Any information or suggestions for use concerning Sika's products, which we either in writing or orally have given buyers or end-users of the product, have been given in good faith based on our own experiences and based on approved praxis and the technological and scientific knowledge on the time of giving such suggestions and information, which are given without any type of guarantees, and which do not lead to any further responsibility from Sika Danmark A/S, besides what is stated in the sales agreement in question. The buyer or end-user should themselves investigate or otherwise make sure, that our products are suitable for the use in question and further make sure that the products are kept and used correct and in agreement with the published rules and considering the actual conditions in order to avoid damages or less satisfactory results. Any order is accepted and any deliverance is affected according to the general terms of sales and delivery from Sika Danmark A/S, which are considered known and accepted, and which could be handed out when asked for. Our catalogues are not up-dated automatically. The present product data sheet is only for use in Denmark. Values stated in the present product data sheet should be seen as recommended, unless stated otherwise.

## PRODUCT DATA SHEET

Sikaflex®-295 UV  
Version 03.01 (04 - 2023), en\_DK  
012001212954001000

Sika Danmark A/S  
Hirsemarken 5  
3520 Farum  
Tlf. +45 48 18 85 85  
www.sika.dk

